


A slim and versatile horizontal sliding system that provides easy access to the external window for ventilation.

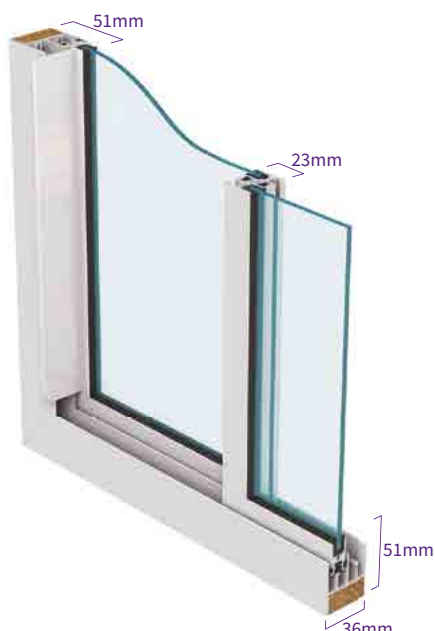

**FEATURES**

- Available with 2, 3 or 4 sliding sashes (panels)
- Sashes slide on glide pads (ref R1)
- Full height, integral projecting handle (ref H1)
- 23mm wide interlock stile
- Twin brush seals ensure high sealing efficiency
- Fixings concealed within the frame – trims not required
- Sashes are removable for maintenance and cleaning
- Frames may be linked with a colour matched aluminium transom/mullion section

**DIMENSIONS**

Recommended maximum frame

Format	Height (mm)	Width (mm)
2 PANES	2200	2800
3 PANES	2200	4200
4 PANES	2200	4900

Maximum sash (h)2200mm x (w)1400mm, minimum sash (h)350mm x (w)250mm

Overall dimensions are subject to a maximum sash weight of 40kg and a risk assessment covering window location and type of end user

Sash height to width ratio should not normally exceed 4:1

**FRAME COLOUR**

Stock finish is white HIPCA 9910 semi-gloss

Any standard powder paint, wood grain finish or anodised finish to order

**OPTIONS**

<b>Glazing</b>	4mm to 6.8mm
<b>Frames</b>	Heavy duty interlock stile Heavy duty box interlock stile Low profile running track to clear inward opening windows (ref F2) Triple track allowing 3 sashes to stack at one end (ref F3) Curved jambs- minimum radius 450mm
<b>Hardware</b>	R2 Medium duty ball-race with nylon tyre
<b>Ironmongery</b> (see page 44/45)	H3 Recessed finger pull for contra-sliding L1 Shoot-bolt L2 Lockable fitch catch L4 Plunge lock L13 Sliding latch L28 'U' channel track restrictor